

KHS temperature sensor Pt 1000, figure 628 0G



Product Features


- for connection to the KHS control systems, for temperature-controlled flushing, the KHS Hygiene Flush Box PRO, or the building management system (BMS)
- wetted metal parts made from dezincification-free and corrosion-resistant gunmetal, resistant against aggressive water
- including 4-wire Pt1000 temperature sensor
- full bore
- male union thread
- free from dead spots

Standards and Approvals

- WRAS approval
- according to accepted materials list from German environmental agency
- DIN EN 60751
- ÜA-Reg.-Nr. R-15.2.3-21-17048, WIEN-ZERT

Technical Data

- pressure rating PN 16
- min. operating temperature 0 °C
- max. operating temperature 105 °C
- length of connection cable 1 m
- wire cross section 4 x 0.22 mm²
- diameter of the sensor 0.2 in
- tolerance class A

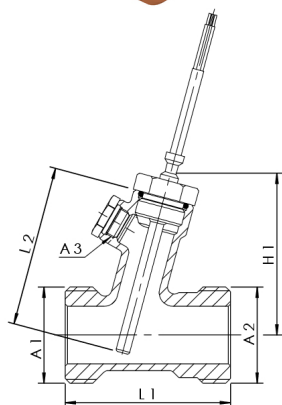

part no.	DN	A1	A2	A3	H1 (mm)	L1 (mm)	L2 (mm)	kg
6280G01500	15	G 3/4	G 3/4	G 1/4	65	65	60	0,380
6280G02000	20	G 1	G 1	G 1/4	68	67	60	0,431
6280G02500	25	G 1 1/4	G 1 1/4	G 1/4	70,5	72	70	0,591
6280G03200	32	G 1 1/2	G 1 1/2	G 1/4	78	77	80	0,656
6280G04000	40	G 1 3/4	G 1 3/4	G 1/4	79	82	80	0,763
6280G05000	50	G 2 3/8	G 2 3/8	G 1/4	88,5	90	80	1,174

accessory

- insulation shell for MULTI T-PIECE, figure 471 28
- gunmetal solder union connector, figure 476 04
- gunmetal union connector, union nut, FPT, figure 476 06
- gunmetal union connector, union nut, FPT, with drain valve, figure 476 07
- gunmetal union connector, union nut, MPT, figure 476 08
- solder / pressfit union connector, figure 476 14
- pressfit union connector, MAPRESS stainless steel and copper, figure 476 22
- pressfit union connector, SANPRESS and PROFIPRESS, figure 476 30
- pressfit union connector, SANHA and NiroSan, figure 476 35
- pressfit union connector, MEPLA, figure 476 40
- pressfit union connector, MAPRESS stainless steel, figure 476 20
- pressfit union connector, SANPRESS INOX, figure 476 70
- pressfit union connector for Viega RAXOFIX, figure 476 32